

Video Detector




OVERVIEW

Installed in front of and opposite to every parking space to capture real-time images from each parking space, show real-time parking status and guide drivers to the nearest available parking spaces.

Features

- (1) integrated with LED indicator as one unit, show green for vacancy, red for occupancy
- (2) adopt advanced video compression technology, high compression ratio and flexible handling (3) 1,000,000 pixels, scans CMOS line by line, max. resolution up to 1280*960
- (4) support D1 video coding (640*480) and capturing
- (5) support JPEG capturing, max. size of image up to 1280*960
- (6) support recognize parking status and

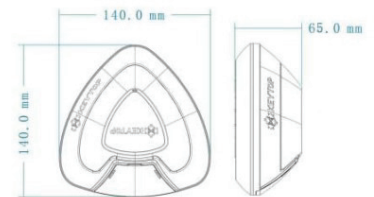

TECHNICAL SPECIFICATIONS

PARAMETER	IPP-VD-I1A
Input Voltage	12VDC
Max. Power	2.4W
Port Type	RJ45 network port, communication + power
Captured Parking Spaces	Max. 1 Parking Space
Min. Illuminance	0.1 Lux (plate recognition ≥ 12 lux)
White Dynamic	Support
Working Humidity	10%-90%
Appearance Size	140*140*65mm
Max. Working Current	200mA
Operation System	Linux
Photo Resolution	1.0 million pixels 1280*960
Response Time	5s
White Balance	Support
3D De-noise	Support
Working Temperature	-20°C ~ +60°C

USA & CANADA

Tel +1-877-6774040
info@iparkpro.com

Williams Tower, 41st Floor, 2800 Post Oak Boulevard, Houston, TX 77056, USA

EUROPE

Tel +44-203-835-2255
uk@iparkpro.com

86-90 Paul Street, London, England, United Kingdom, EC2A 4NE

MIDDLE EAST

Tel +971 4 556 1557
mena@iparkpro.com

Boulevard Plaza Tower One, Level 3, Downtown Dubai, United Arab Emirates