


IPP-VD-I3A

VIDEO DETECTOR

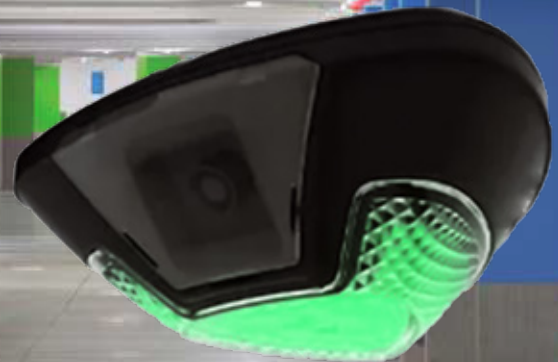

DESCRIPTION

Installed in front of and opposite to every 3 parking spaces to capture real-time images from each parking space, show real-time parking status and guide drivers to the nearest available parking spaces.

FEATURES


- ▶ Integrated with led indicator as one unit, show green for vacancy, red for occupancy
- ▶ Adopt advanced video compression technology, high compression ratio and flexible handling
- ▶ 4 million pixels, scans cmos line by line, max. Resolution up to 2592*1520
- ▶ Support d1 video coding and capturing
- ▶ Support jpeg capturing, max. Size of image up to 2592*1520
- ▶ Support recognize parking status and continuous capturing

TECHNICAL SPECIFICATIONS

PARAMETER	IPP-VD-I3A
Input Voltage	12VDC
Max. Power	3.6W
Port Type	RJ45 network port, communication+power
Captured Parking Spaces	Max. 1 Parking Space
Min. Illuminance	0.1 Lux (plate recognition ≥ 12 lux)
White Dynamic	Support
Working Humidity	10%-90%
Appearance Size	140*140*65mm
Max. Working Current	300mA
Operation System	Linux
Photo Resolution	4 million pixels 2592*1520
Response Time	5s
White Balance	Support
3D De-noise	Support
Working Temperature	-20°C+60°C



DIMENSIONS

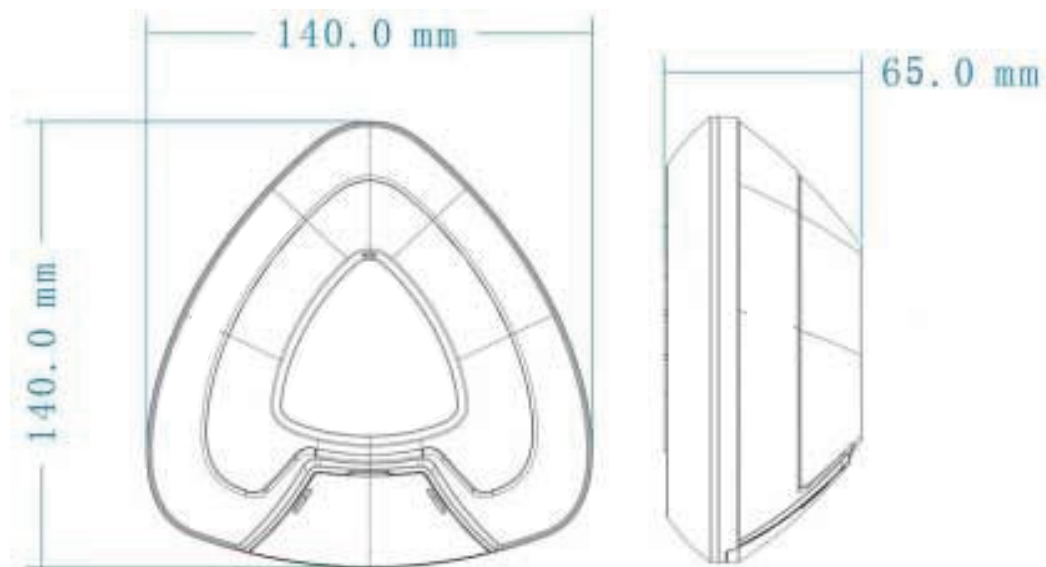

USA & CANADA

Tel +1-877-6774040
info@microlinknet.com
Williams Tower, 41st Floor, 2800 Post
Oak Boulevard, Houston, TX 77056, USA

EUROPE

Tel +44-20-37695558
uk@microlinknet.com
86-90 Paul Street, London, England,
United Kingdom, EC2A 4NE

MIDDLE EAST

Tel +971 4 556 1557
mena@microlinknet.com
Boulevard Plaza Tower One, Level 3,
Downtown Dubai, United Arab Emirates