

IPP-VD-I3A

VIDEO DETECTOR



DESCRIPTION

Installed above the driveway, orients to 3 parking spaces at the left side and the other 3 parking spaces at the right side, totally can get information of 6 parking spaces. Video detector captures real-time photos and get parking status of every parking space. It is integrated with LED indicator, when all 6 parking spaces are occupied, it turns to Red. Otherwise it keeps Green.

FEATURES


- ▶ Adopt advanced video compression technology, high compression ratio and flexible handling
- ▶ Scan CMOS line by line, max. Resolution up to 2304*1296
- ▶ Support H.264 video coding and capturing
- ▶ Support JPEG capturing, max. Size of image up to 2304*1296
- ▶ Support recognize parking status and continuous capturing

TECHNICAL SPECIFICATIONS

PARAMETER	IPP-VD-I3A
Input Voltage	12VDC
Max. Power	4.2W
Port Type	RJ45 network port, communication+power
Captured Parking Spaces	Max. 6 Parking Space
Min. Illuminance	0.1 Lux (plate recognition ≥ 12 lux)
White Dynamic	Support
Working Humidity	10%-90%
Appearance Size	170*158*60MM
Max. Working Current	350mA
Operation System	Linux
Photo Resolution	4,000,000 pixels 2304*1296
Response Time	5s
White Balance	Support
3D De-noise	Support
Working Temperature	-20°C+60°C



DIMENSIONS

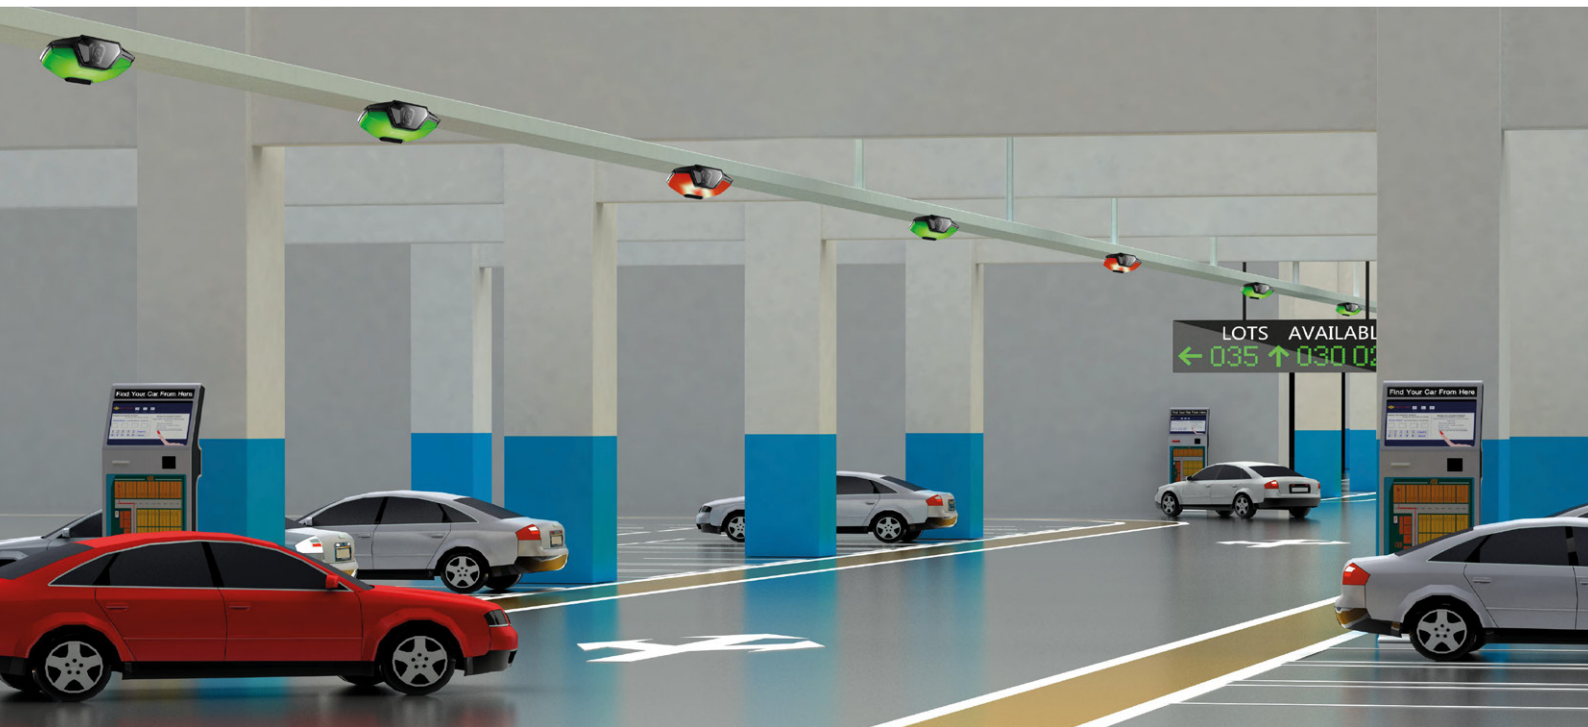

USA & CANADA

Tel +1-877-6774040
info@microlinknet.com
Williams Tower, 41st Floor, 2800 Post
Oak Boulevard, Houston, TX 77056, USA

EUROPE

Tel +44-20-37695558
uk@microlinknet.com
86-90 Paul Street, London, England,
United Kingdom, EC2A 4NE

MIDDLE EAST

Tel +971 4 556 1557
mena@microlinknet.com
Boulevard Plaza Tower One, Level 3,
Downtown Dubai, United Arab Emirates